




shaping your dreams



OSG GROUP COMPANY

CARBIDE CUTMASTER ROUGHING END MILL RANGE

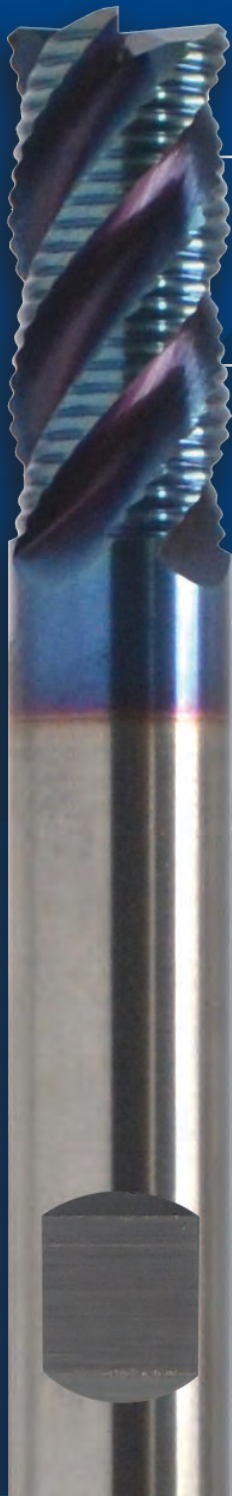

- 1 Wider Lands
- 2 Improved Rake and Helix Angle Geometry Convergence
- 3 New Coating Technology
- 4 Size Range 6 to 20mm

Improved Manufacturing Process resulting in:

- ✓ Increased Rigidity
- ✓ Highly Efficient Milling
- ✓ Smoother Cuts
- ✓ Longer Tool Life

Introducing the Carbide CutMaster Roughing End Mill Range

- Recommended
- Suitable

P						M				K				Ti			Ni			Cu				N				Syn			H			
1.1	1.2	1.3	1.4	1.5	1.6	2.1	2.2	2.3	2.4	3.1	3.2	3.3	3.4	4.1	4.2	4.3	5.1	5.2	5.3	6.1	6.2	6.3	6.4	7.1	7.2	7.3	7.4	8.1	8.2	8.3	9.1	9.2	9.3	9.4
●	●	●	●	●	●	●	○	○		●	●	●	●	●																				



Solid Carbide 4 Flute Knuckle Form Fine Pitch CutMaster Roughing End Mill
 Maximum stock removal at high feed rates in profiling applications




mm	WORKS STD.	SOLID CARBIDE		TYPE UNI				Z 4			COATED
----	------------	---------------	---	----------	---	---	---	-----	--	---	--------

Diameter	Cutting Length	Overall Length	Shank Diameter	Code
6	13	57	6	03HE0600A
8	16	63	8	03HE0800A
10	22	72	10	03HE1000A
12	26	83	12	03HE1200A
16	32	92	16	03HE1600A
20	38	104	20	03HE2000A

Description	Code
Solid Carbide 4 Flute CutMaster Roughing End Mill Set	03HE0000A
THIS SET CONTAINS:	
6mm - 03HE0600A, 8mm - 03HE0800A, 10mm - 03HE1000A,	
12mm - 03HE1200A, 16mm - 03HE1600A	



CUTTING DATA

	ap = 1.0 x d ae = 0.5 x d Side Milling = fz		ap = 1.5 x d ae = 0.3 x d Side Milling = fz		ap = 1.0 x d ae = 1.0 x d Slot Milling = fz x 0.7
---	---	---	---	---	---

- Recommended
- Suitable


Material	Vc m/min	Ø 6	8	10	12	16	20
		fz (mm/tooth)	fz (mm/tooth)	fz (mm/tooth)	fz (mm/tooth)	fz (mm/tooth)	fz (mm/tooth)
P	● 1.1 Free Cutting Steel < 120 HB	175	0.027-0.045	0.037-0.061	0.044-0.074	0.054-0.090	0.065-0.109
	● 1.2 Structural Steel < 200 HB	165	0.027-0.045	0.037-0.061	0.044-0.074	0.054-0.090	0.065-0.109
	● 1.3 Plain Carbon Steel < 250 HB	140	0.023-0.038	0.031-0.051	0.037-0.061	0.046-0.076	0.056-0.094
	● 1.4 Alloy Steel < 250 HB	140	0.023-0.038	0.031-0.051	0.037-0.061	0.046-0.076	0.056-0.094
	● 1.5 Low Alloy Steel 250 - 350 HB	120	0.020-0.034	0.028-0.046	0.033-0.055	0.041-0.068	0.050-0.083
	● 1.6 Low Alloy Steel > 350 HB	110	0.020-0.034	0.028-0.046	0.033-0.055	0.041-0.068	0.050-0.083
M	● 2.1 Free Machining Stainless Steel < 250 HB	90	0.023-0.038	0.031-0.051	0.037-0.061	0.046-0.076	0.056-0.094
	○ 2.2 Austenitic Stainless Steel < 320 HB	90	0.023-0.038	0.031-0.051	0.037-0.061	0.046-0.076	0.056-0.094
K	○ 2.3 Ferritic and Martensitic Stainless Steel < 300 HB	80	0.018-0.030	0.025-0.041	0.029-0.049	0.037-0.061	0.045-0.075
	● 3.1 Lamellar Graphite Cast Iron < 150 HB	140	0.027-0.045	0.037-0.061	0.044-0.074	0.054-0.090	0.065-0.109
	● 3.2 Lamellar Graphite Cast Iron 150 - 300 HB	115	0.018-0.030	0.025-0.041	0.029-0.049	0.037-0.061	0.045-0.075
	● 3.3 Nodular Graphite, Malleable Cast Iron < 200 HB	125	0.023-0.038	0.031-0.051	0.037-0.061	0.046-0.076	0.056-0.094
Ti	● 3.4 Nodular Graphite, Malleable Cast Iron 200 - 300 HB	115	0.018-0.030	0.025-0.041	0.029-0.049	0.037-0.061	0.045-0.075
	● 4.1 Titanium unalloyed < 200 HB	65	0.018-0.030	0.025-0.041	0.029-0.049	0.037-0.061	0.045-0.075

Parameters based on ideal conditions. Please adjust parameters accordingly to real applications.

TEST RESULTS



Carbide Roughing End Mill Distance / Wear

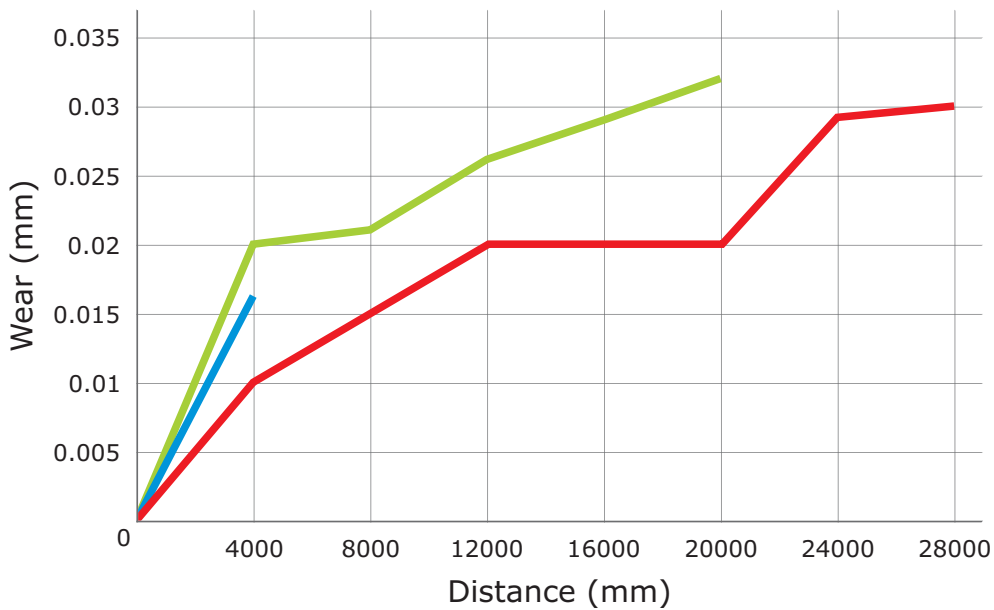

- **New Somta 03HE**
- **Competitor**
- **Old Somta 03E**

10mm Side Milling in M200 Alloy Steel using Coolant
 $a_p = 1x_d$ | $a_e = 0.5x_d$ | $V_c = 125\text{m/min}$ | Feed = 955mm/min




— Old Somta 03E

Load 1-35/6 (spindle/axis load) Quiet on contact.
 Good surface finish.
 Chipped on Knuckle after 4 Meters.
 Tool badly damaged at 8 Meters.
 Load @ end 20-37/6 (spindle/axis load).



— Competitor

Load 1-36/5 (spindle/axis load) Quiet on contact.
 Good surface finish.
 Slight chip on Knuckle after 4 Meters.
 Increase in chipping after 12 Meters.
 All 4 flutes chipped in front at 20 Meters.
 Load @ end 50-41/4 (spindle/axis load).



— New Somta 03HE

Load 1-34/4 (spindle/axis load) Quiet on contact.
 Good surface finish.
 Slight chip on Knuckle after 24 Meters.
 Slight increase in chipping at 28 Meters.
 Load @ end 70-37/4 (spindle/axis load).



Manufacturers & Suppliers
of Drills, Reamers, End Mills,
Bore Cutters, Taps & Dies,
Toolbits, Solid Carbide Tooling,
Carbide Insert Tooling,
Custom Tools and
Surface Coatings

Head Office and Surface Coating Division

290-294 Moses Mabhida Road,
Pietermaritzburg, 3201
South Africa

Tel Factory: +27 33 355 6600
Email Factory: info@somta.co.za

Gauteng Sales Office

6 & 7 Innes Park, 38 Jansen Road,
Jet Park, Boksburg, 1459
South Africa

Tel Sales: +27 11 390 8700 (Local/Africa/Exports)
Email Sales: jhbsales@somta.co.za (Local)
Email Sales: african@somta.co.za (Africa)
Email Sales: exports@somta.co.za (Exports)

Technical Information:

Email Technical: tech@somta.co.za



<http://app.somta.co.za>



OSG GROUP COMPANY

www.somta.co.za



SABS
ISO 9001

PerformCoat

oerlikon
balzers